

YP[®]



GQR2 系列液压去肉机 HYDRAULIC FLESHING MACHINE


技术参数/Technical parameter

型号 / Model	GQR2-	220	270	320
工作面宽度 / Working Width	mm	2200	2700	3200
刀辊外径 / O/D of Blade Cylinder	mm	Φ260	Φ260	Φ260
刀辊电机型号及功率 / Main motor Kw		Y225M-4 45	Y225M-4 45	Y250M-4 55
刀辊转速 / Speed of Blade Cylinder	rpm	1480	1480	1480
油泵电机型号及功率 / Oil Pump Motor Kw		Y160M-4 B5 11	Y160M-4 B5 11	Y160L-4 B5 15
油泵工作压力 / Pump Pressure	bar	40-45	40-45	40-45
送料速度 / Feed Speed	m/min	19-50	19-50	19-50
操作人数 / Operators		1-2	1-2	1-2
生产能力 / Capacity	hide/hour	120-150	120-150	120-150
外形尺寸 / L×W×H	mm	4400×1540×1600	4900×1540×1600	5400×1540×1600
机器质量 / Net Weight	Kg	7200	7850	9000

扬宝机械有限公司
Young-Pearl Machinery Co., Ltd.

江苏省扬州市江阳东路35号 35 Jiangyang Donglu Yangzhou Jiangsu, P.R. of China
电话 / Tel: (0514) 7233712 7229185 传真 / Fax: (0514) 7233089 邮编 / Post code: 225003
网址: <http://www.young-pearl.com> Email: yp@young-pearl.com la@young-pearl.com

扬宝机械有限公司
Young-Pearl Machinery Co., Ltd.

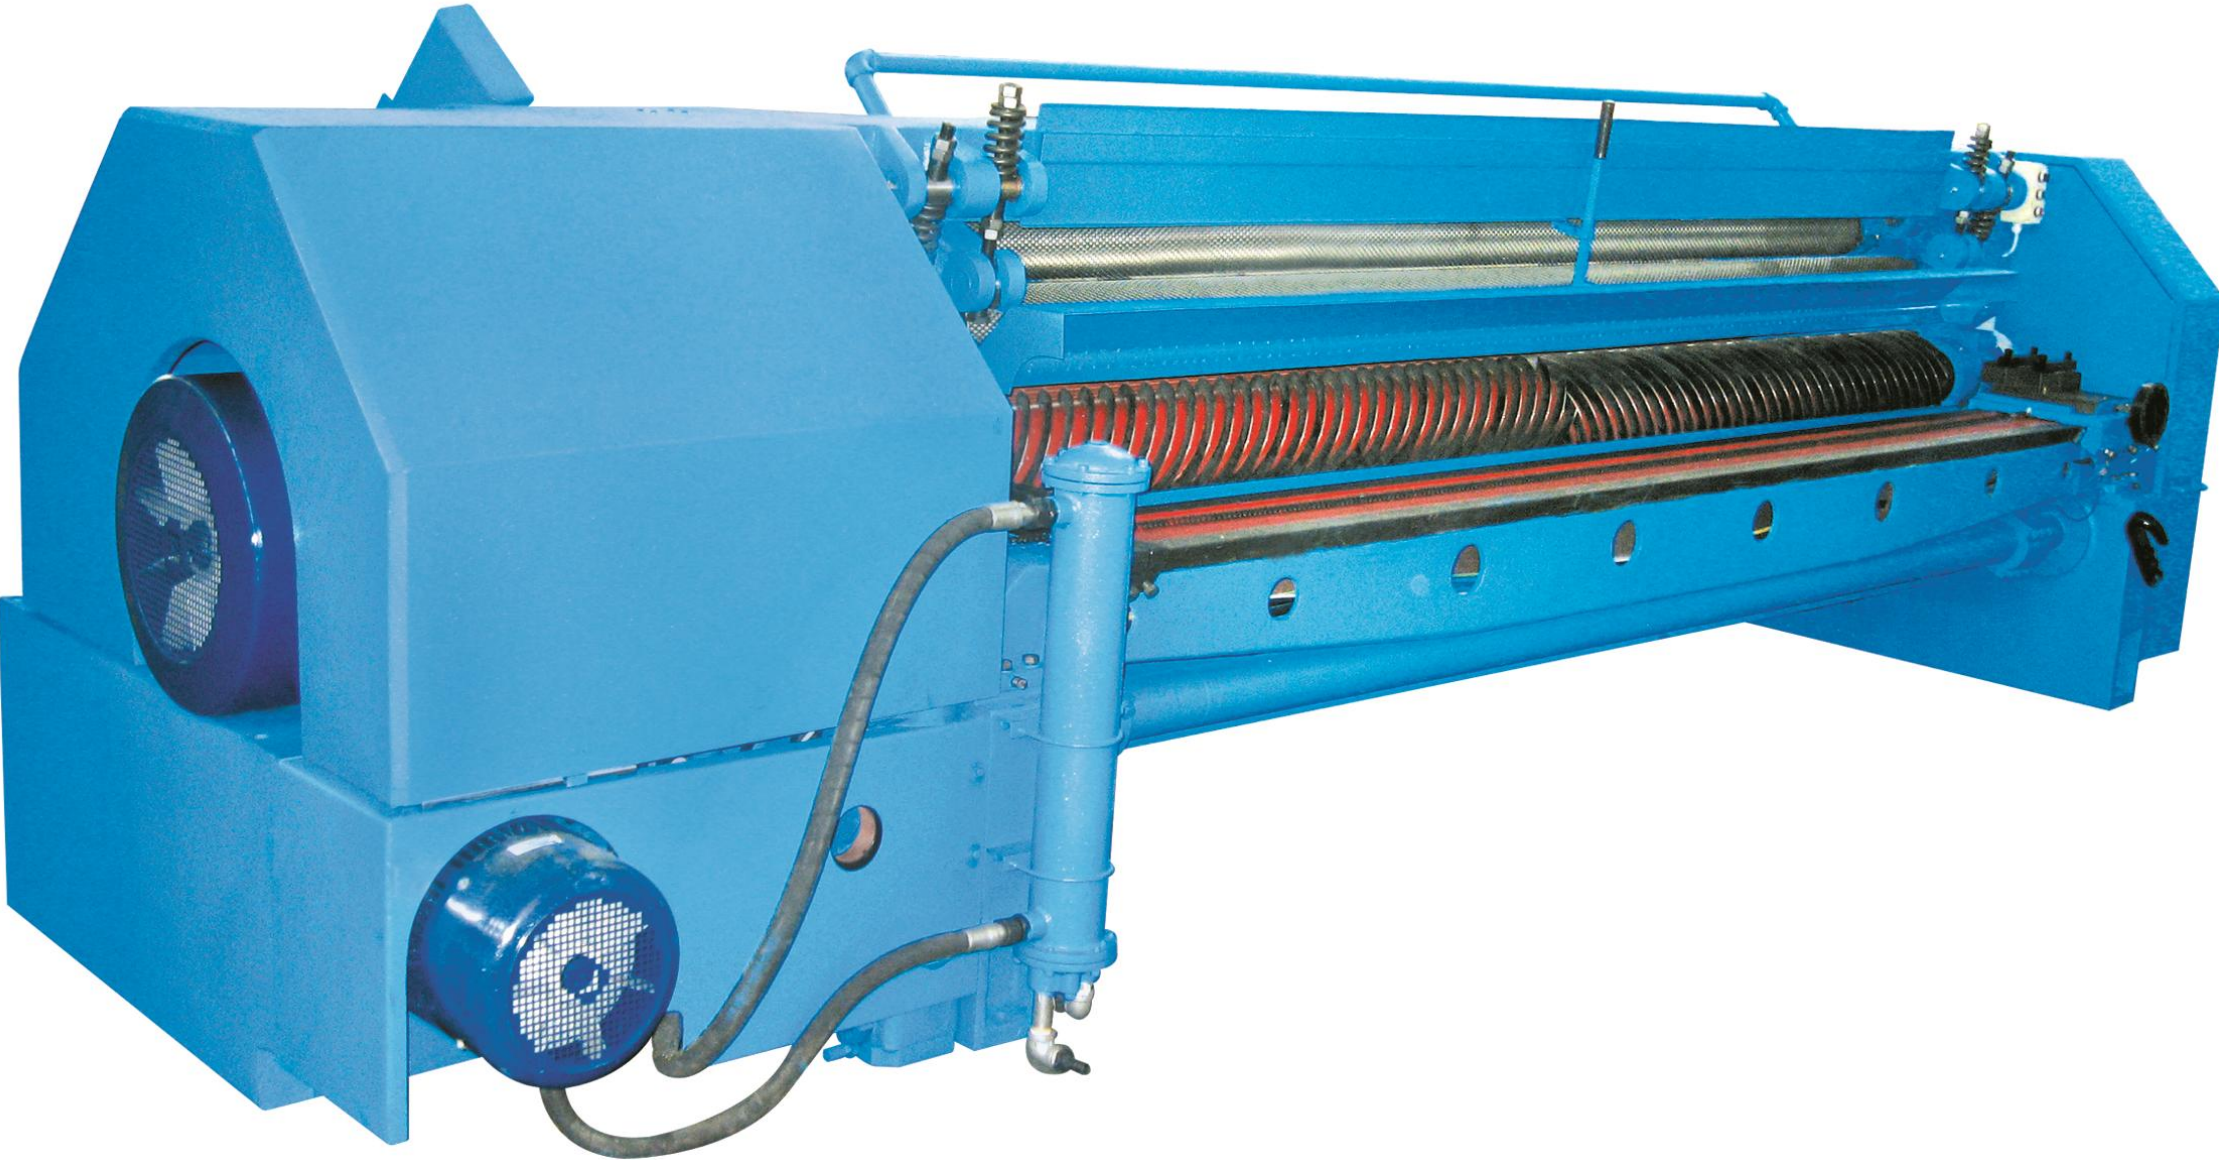

GQR2 SERIES HYDRAULIC FLESHING MACHINE

GQR2 series HYDRAULIC FLESHING MACHINE, with a new design and up-to-date characteristics is developed on the basis of our long-time experience combined with the international advanced technology. The machine is especially suitable for fleshing whole hides.

Main features:

- 👉 The framework of the machine is made of high strength cast-iron and high quality steel plate, it is firm and steady. The machine can run well normally.
- 👉 The high strength bladed cylinder heat-treated of the machine is made of high quality alloy steel, the channels of inserting blades are processed by a special advanced machine, their lead are standard and the channels are distributed uniformly. The bladed cylinder essembly is balanced in substep before and after assembling, and its accuracy class is not lower than G6.3. The bearings assembled on the bladed cylinder are all from international famous brand.
- 👉 The discharge roller (roller with rhombic channel) is processed by a special machine, can prevent the hide wavering efficiently while working and ensure discharging smoothly. Its surface is chromed for rust-prevention and duration.
- 👉 Opening and closing with dampened travel by hydraulic control can ensure beginning and ending of fleshing smoothly;
- 👉 The hydraulically controlled transport with adjustable continuous speed is 19~50M/min;
- 👉 Adopt the hydraulic supporting system of rubber rod pallet, can completely fleshing in any thin and thick parts of hide without adjusting working clearance. The automatic adjusting thickness is within 10mm.
- 👉 During the fleshing process, the rubber roller of the machine can open automatically for the hide coming out .this is advantage for installing the machine at a high place.
- 👉 Double safety device for the operators in working area is consist of a sensitive barrier and 2 dual-linked foot-switches for control closing:

GQR2 系列液压去肉机

GQR2系列液压去肉机结构新颖、性能先进，系本公司依据多年皮革机械制造经验结合国际先进技术研制而成。本系列机器特别适用于大型皮张的去肉加工。

主要特点：

- 👉 机架由高强度铸铁和优质钢板制成，坚固平稳，以确保机器在平稳状态下正常运行。
- 👉 经热处理加工的高强度刀辊由优质合金钢制成。刀片镶嵌槽采用特殊先进设备加工，导程标准，刀槽分布均匀。刀辊总成装配前后皆经过分步动平衡检验，精度等级不低于G6.3。刀辊装配用轴承均采用国际知名品牌；
- 👉 采用专用机床加工的出料辊（菱形槽辊），能有效防止出料时皮张游移，确保出料平稳。其辊体表面镀有防腐耐磨硬铬层，防锈耐用。
- 👉 液压控制开合辊动作具有缓冲行程，使去肉加工过程起始平稳；
- 👉 液压控制送料速度，其可连续调速范围为：19—50米/分；
- 👉 胶棒托板采用液压支承系统，无需调节工作间隙即可使皮张各厚薄不均部分皆完全去肉，其自动调节范围为：10毫米；
- 👉 在去肉过程中，机器可自动开辊送出皮张，这有利于机器高台安装；
- 👉 操作区域设有双保险装置保护操作者的安全：动作敏捷的安全护板和控制合辊的双联动脚踏开关